



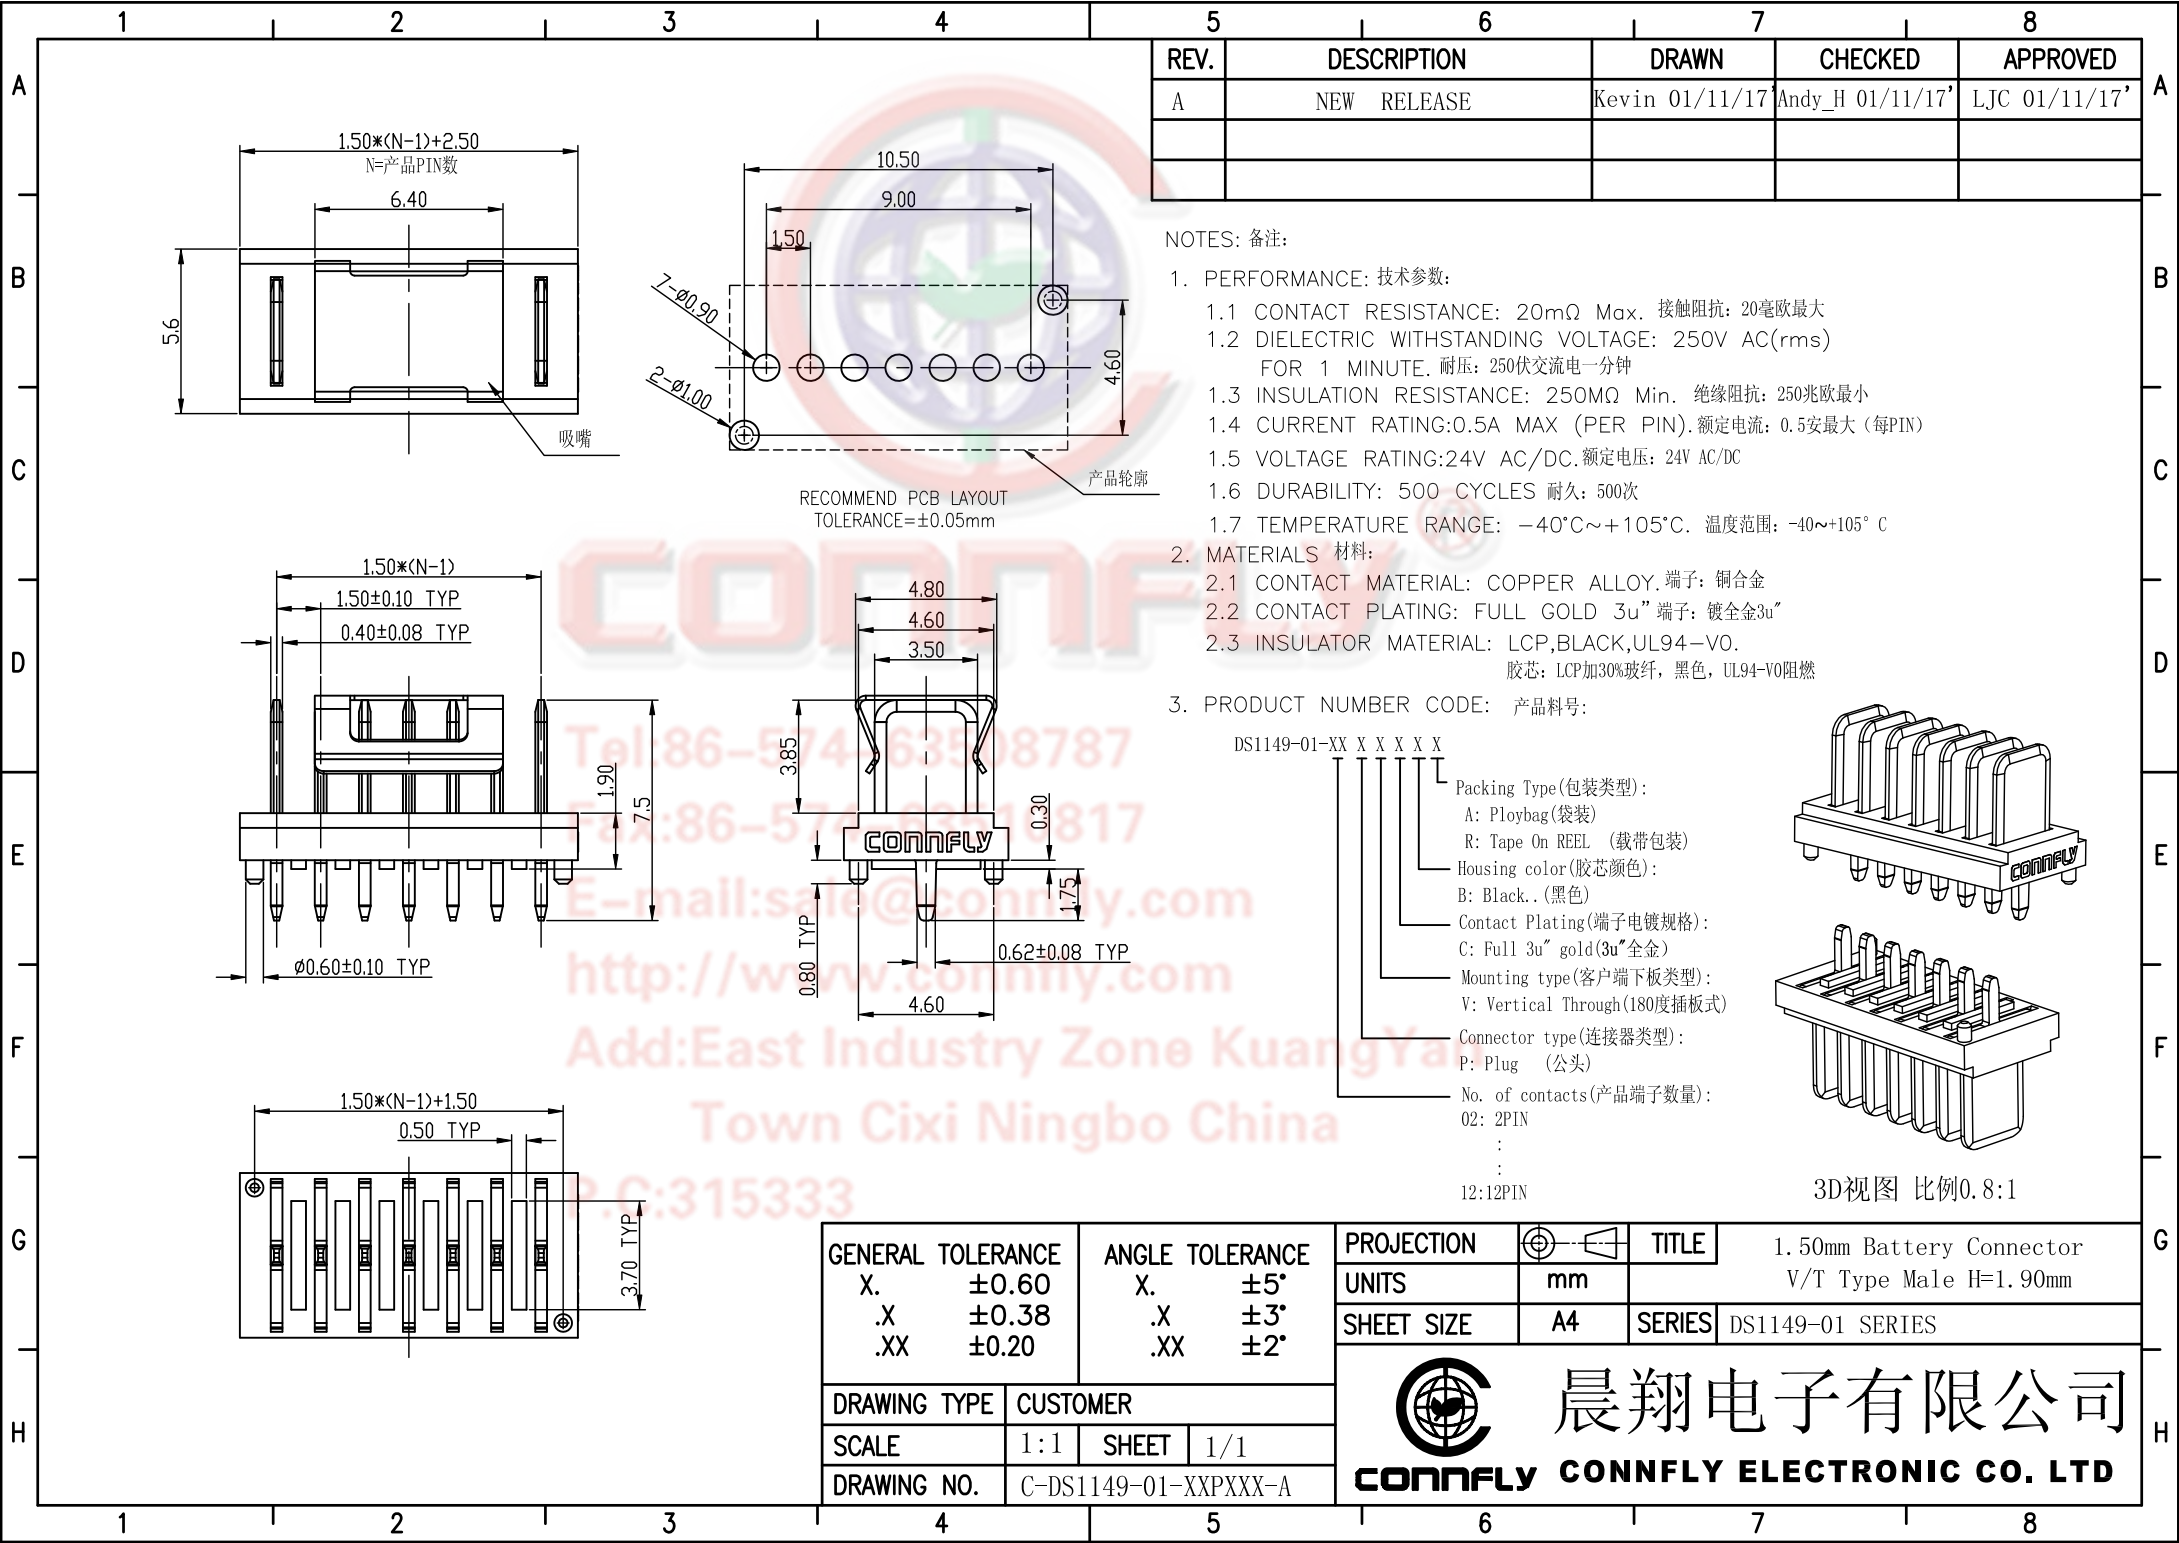

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	Kevin 01/11/17	Andy_H 01/11/17	LJC 01/11/17

- NOTES: 备注:
1. PERFORMANCE: 技术参数:
- 1.1 CONTACT RESISTANCE: 20mΩ Max. 接触阻抗: 20毫欧最大
 - 1.2 DIELECTRIC WITHSTANDING VOLTAGE: 250V AC(rms) FOR 1 MINUTE. 耐压: 250伏交流电一分钟
 - 1.3 INSULATION RESISTANCE: 250MΩ Min. 绝缘阻抗: 250兆欧最小
 - 1.4 CURRENT RATING: 0.5A MAX (PER PIN). 额定电流: 0.5安最大 (每PIN)
 - 1.5 VOLTAGE RATING: 24V AC/DC. 额定电压: 24V AC/DC
 - 1.6 DURABILITY: 500 CYCLES 耐久: 500次
 - 1.7 TEMPERATURE RANGE: -40°C~+105°C. 温度范围: -40~+105° C
2. MATERIALS 材料:
- 2.1 CONTACT MATERIAL: COPPER ALLOY. 端子: 铜合金
 - 2.2 CONTACT PLATING: FULL GOLD 3u" 端子: 镀全金3u"
 - 2.3 INSULATOR MATERIAL: LCP, BLACK, UL94-V0. 胶芯: LCP加30%玻纤, 黑色, UL94-V0阻燃
3. PRODUCT NUMBER CODE: 产品料号:

- DS1149-01-XX X X X X X
- Packing Type(包装类型):
 - A: Ploybag(袋装)
 - R: Tape On REEL (载带包装)
 - Housing color(胶芯颜色):
 - B: Black..(黑色)
 - Contact Plating(端子电镀规格):
 - C: Full 3u" gold(3u"全金)
 - Mounting type(客户下板类型):
 - V: Vertical Through(180度插板式)
 - Connector type(连接器类型):
 - P: Plug (公头)
 - No. of contacts(产品端子数量):
 - 02: 2PIN
 - :
 - :
 - 12: 12PIN

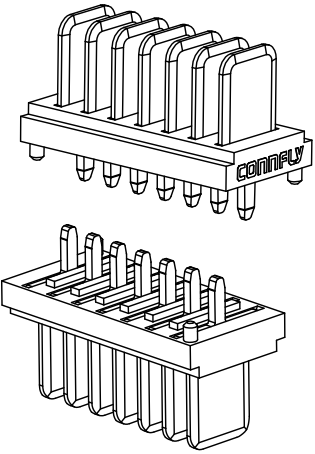

3D视图 比例0.8:1

GENERAL TOLERANCE X. ±0.60 .X ±0.38 .XX ±0.20		ANGLE TOLERANCE X. ±5° .X ±3° .XX ±2°		PROJECTION  TITLE		1.50mm Battery Connector			
				UNITS mm		V/T Type Male H=1.90mm			
				SHEET SIZE A4		SERIES	DS1149-01 SERIES		
DRAWING TYPE		CUSTOMER		 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD					
SCALE		1:1						SHEET	1/1
DRAWING NO.		C-DS1149-01-XXPXXX-A							