
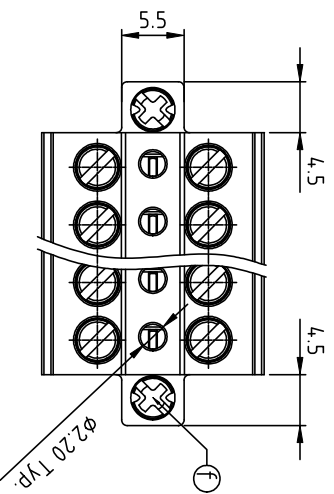



SIGN	DATE	DESCRIPTION	APPROVER
Δ	10/16/14	Change the position of protruding point & update the drawing	Evan
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			



- Material
- Item Δ Terminal up housing: Thermoplastic (UL94V-0)
 - Item @ Terminal down housing: Thermoplastic (UL94V-0)
 - Item Q Terminal screw: Steel, Zinc plating "-" slot type
 - Item Q Clamp: Brass, Ni plated
 - Item @ Wire guard: PhBz, Tin plated
 - Item Q With flange screw: Steel M2.5 "+/-" slot type Zinc plating

Electrical cULus

- Voltage rating: 300V
- Current rating: 12A
- Solid wire (AWG): 12-24
- Stranded wire (AWG): 12-24
- Torque (lb-in): 4.3
- Screw: M3
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6kV
- Operating temperature: -40°C to +115°C
- Critical dimension: Δ

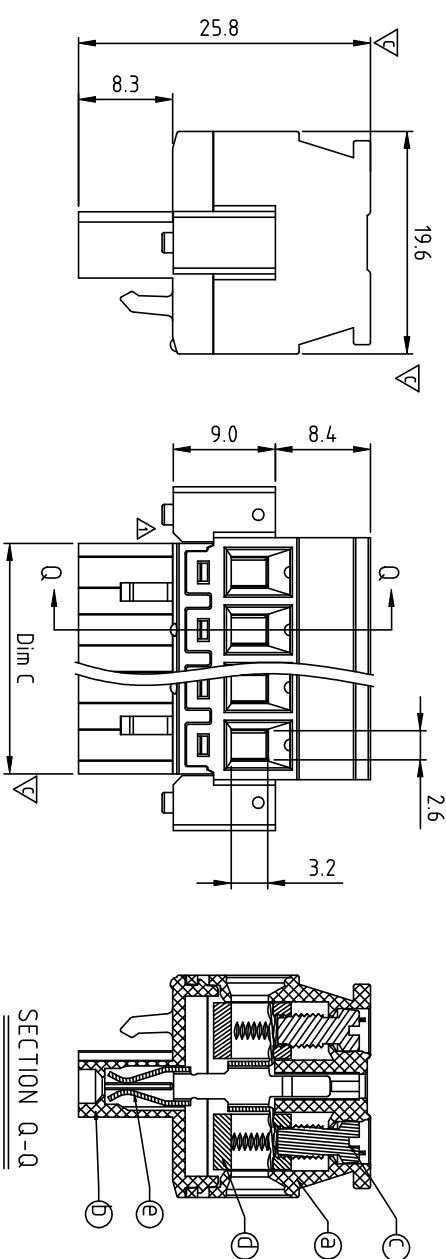


SECTION Q-Q

Dim L	N×5.08±1.0
Dim P	(N-1)×5.08
Dim A	N×5.08±10.0
Dim B	(N+1)×5.08
Dim C	N×5.08

N=NUMBER OF POLES

TOL				
2P-6P	7P-12P	13P-18P	19P-24P	
Dim L	±0.15	±0.25	±0.35	±0.40
Dim P	±0.15	±0.25	±0.35	±0.40
Dim A	±0.15	±0.25	±0.35	±0.40
Dim B	±0.15	±0.25	±0.35	±0.40
Dim C	±0.15	±0.25	±0.35	±0.40

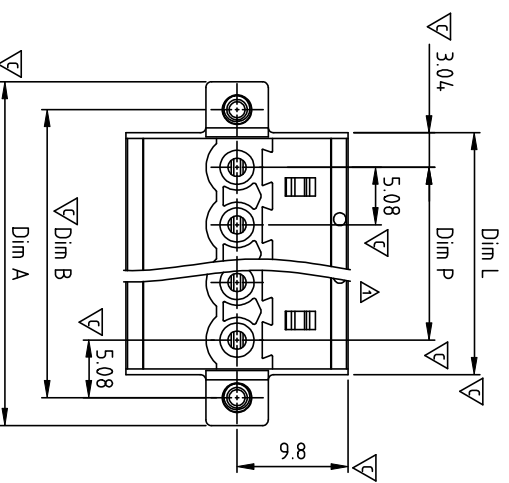

K5 XX 51 X 1 XXXX G

Δ No. OF POLES: 02 2 poles, 03 3 poles, ... 24, 24 poles

Color: 0 Black (RAL9005), 2 Red (RAL3001/D), 3 Orange (RAL2011/P), 4 Yellow (RAL1018/A), 5 Green (RAL6018/T), 6 Blue (RAL5015/A), 8 Grey (RAL7035/D), C Green (RAL 6018/U)

G RoHS compliant Δ (lead<4%) In copper Alloy

0000: "Q" Logo (Standard)
000A: "ANYTEK" Mark
Any special item by customer request.
please contact sales department.

ANYTEK		CUSTOMER COPY	
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD			
TITLE: K5 - 5.08 Series 2P-24P "-" screw (With flange)		DWG NO. BK50002	
PART NO. K5xx51x1xxxxG		CUST NO.	
APPROVED	CHECKED	DESIGNED	DRAWN
	Evan		Evan
2014.10.16		2014.10.16	
SHEET: 01/01		REV: C	
		Tolerance: X.±0.50, X.X.±0.30, X.XX.±0.10, X°.±1°	